



Track Lighting Fixture

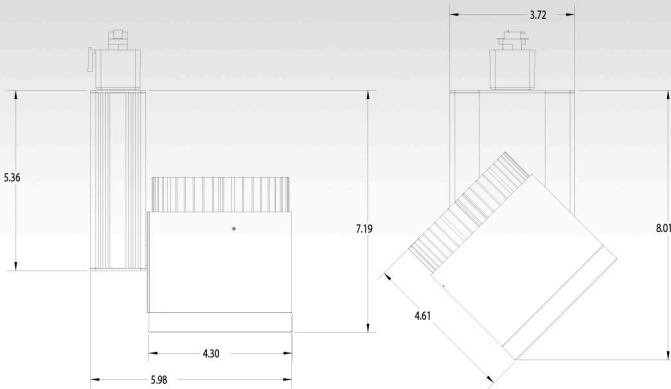

Light Cone Data

Light Fixture	TLC09				
Wattage	12				
REAL SPOT (RS)					
Distance From Wall	2700K CBFC Max	3000K CBFC Max	3500K CBFC Max	50% CBFC Beam Diameter	
5.0'	779	820	861	10	
7.5'	344	362	380	14	
10.0'	192	202	212	18	
12.5'	122	128	134	22	
15.0'	91	96	101	26	
DIFFUSED (D)					
Distance From Wall	2700K CBFC Max	3000K CBFC Max	3500K CBFC Max	50% CBFC Beam Diameter	
5.0'	399	420	441	14	
7.5'	181	191	201	20	
10.0'	102	107	112	26	
12.5'	65	68	71	32	
15.0'	46	48	50	38	
MEDIUM (M)					
Distance From Wall	2700K CBFC Max	3000K CBFC Max	3500K CBFC Max	50% CBFC Beam Diameter	
5.0'	114	120	126	21	
7.5'	51	54	57	33	
10.0'	29	31	33	45	
12.5'	19	20	21	58	
15.0'	13	14	15	70	


Track Lighting Fixture

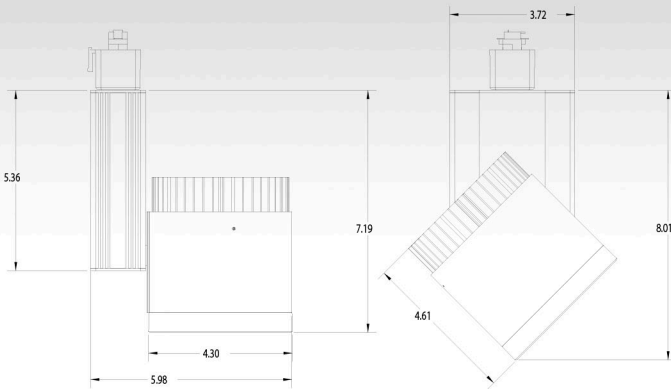

Light Cone Data

Light Fixture		TLC09			
Wattage		24			
REAL SPOT (RS)					
Distance From Wall	2700K CBFC Max	3000K CBFC Max	3500K CBFC Max	50% CBFC Beam Diameter	
5.0'	1291	1359	1427	10	
7.5'	564	594	624	14	
10.0'	315	332	347	18	
12.5'	205	216	227	22	
15.0'	141	148	155	26	
DIFFUSED (D)					
Distance From Wall	2700K CBFC Max	3000K CBFC Max	3500K CBFC Max	50% CBFC Beam Diameter	
5.0'	644	678	712	14	
7.5'	299	315	331	20	
10.0'	168	177	186	26	
12.5'	107	113	118	32	
15.0'	76	80	84	38	
MEDIUM (M)					
Distance From Wall	2700K CBFC Max	3000K CBFC Max	3500K CBFC Max	50% CBFC Beam Diameter	
5.0'	201	211	222	21	
7.5'	88	93	98	33	
10.0'	50	53	57	45	
12.5'	32	34	36	58	
15.0'	23	24	25	70	

Track Lighting Fixture

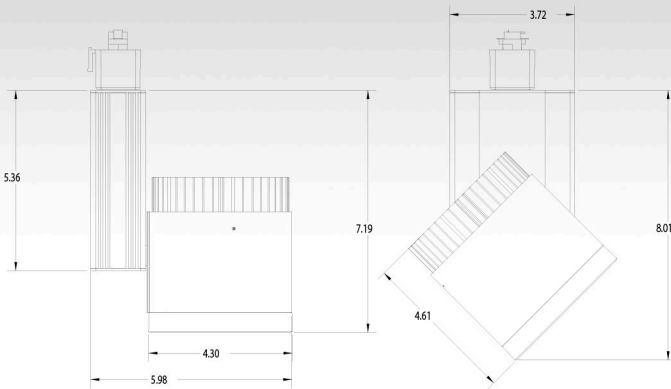

Light Cone Data

Light Fixture		TLC09			
Wattage		36			
REAL SPOT (RS)					
Distance From Wall	2700K CBFC Max	3000K CBFC Max	3500K CBFC Max	50% CBFC Beam Diameter	
5.0'	1596	1680	1764	10	
7.5'	727	765	803	14	
10.0'	410	432	453	18	
12.5'	253	266	279	22	
15.0'	182	192	201	26	
DIFFUSED (D)					
Distance From Wall	2700K CBFC Max	3000K CBFC Max	3500K CBFC Max	50% CBFC Beam Diameter	
5.0'	623	656	689	14	
7.5'	272	286	300	20	
10.0'	152	160	168	26	
12.5'	101	106	111	32	
15.0'	69	73	77	38	
MEDIUM (M)					
Distance From Wall	2700K CBFC Max	3000K CBFC Max	3500K CBFC Max	50% CBFC Beam Diameter	
5.0'	287	302	317	21	
7.5'	125	132	139	33	
10.0'	70	74	78	45	
12.5'	45	47	49	58	
15.0'	36	38	40	70	