
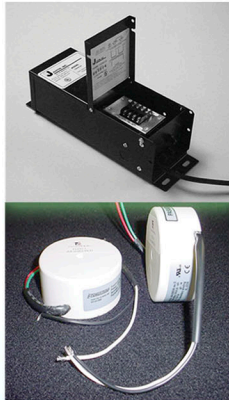


SIGNAGE

POWER SUPPLY SPECIFICATIONS

No Load Balancing Required

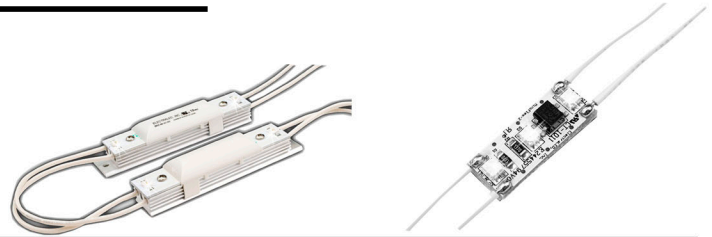

Power Supply Type	Product Type- Maximum Footage Allowances	
	FLEX™	MiniFLEX™
C2240-12 Maximum 4 circuits per transformer KVA .240 AMP Draw 2 H 13" x W 4" x D 4"	All Colors = 56 Feet (1 Module per foot) (2 LEDs per module)	*EM12-CW = 100 Feet All Other Colors = 280 Feet (3 Modules per foot) (3 LEDs per module) * High powered Cool White 25 Feet per circuit
J75W12 Maximum 1 circuit per transformer KVA .060 AMP Draw .5 Height 1.45" Diameter 3.2"	All Colors = 14 Feet (1 Module per foot) (2 LEDs per module)	*EM12-CW = 100 Feet All Other Colors = 70 Feet (3 Modules per foot) (3 LEDs per module) * High powered Cool White single circuit transformer

Specifications subject to change without notice

FLEX

MiniFLEX

C2240-12 = Type NEMA 2 enclosure, weather resistant, dry location, with wall mount brackets and 1/2" conduit access. Output circuit protectors, one per class 2 circuit.