


TrūLite LITE SERIES



AVAILABLE LENGTHS: 2' - 6'

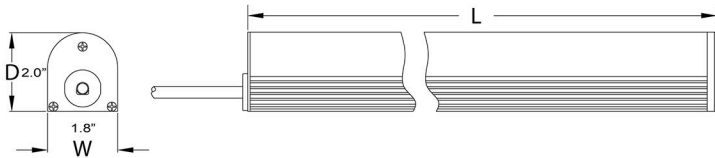

PRODUCT DESCRIPTION:

The TrūLite fixture is available for commercial lighting purposes. The TrūLite was engineered to replace standard fluorescent lamp fixtures using the lowest thermal heat signature available.

FEATURES:

- Latest generation LED components and optics
- Available in 2', 3', 4', 5' and 6' lengths
- Class 2 internal power supply 120 - 277 VAC
- All Color Temps available 2700K-5100K (CCT)
- Life rating: 75,000 hrs (L70)
- Lowest thermal heat signature
- Greatly reduced total life cycle costs
- Operational temperature -50°C - 50°C (-58°F - 122°F)

APPLICATIONS:

- Coolers
- Cold Storage
- Aquariums
- Warehouses
- Beer Caves
- Ceiling Lighting
- Coves
- Food Prep Areas

COMPLIANCE & SAFETY:



PERFORMANCE AT 4200K:

Model	Watts	Lumens	CRI	Length	Width	Depth
LS-C2	7.2	610	80+	24.75"	1.8"	2.0"
LS-C3	10.8	920	80+	36.0"	1.8"	2.0"
LS-C4	14.4	1,230	80+	47.19"	1.8"	2.0"
LS-C5	18.0	1,540	80+	58.44"	1.8"	2.0"
LS-C6	21.6	1,850	80+	69.69"	1.8"	2.0"

ORDERING GUIDE: Ex: LS-C6-4200K-277

Model	Length	CCT(K)	Ceiling Mount
LS-C	2'	27 = 2700	277
LS-C	3'	30 = 3000	
LS-C	4'	35 = 3500	
LS-C	5'	42 = 4200	
LS-C	6'	51 = 5100	

